



Guida alla Configurazione PPPOE su TPLINK EX510

1. Cablaggio connettività

Procedere in primis con il corretto cablaggio con WAN nella porta RJ45 del TpLink e successivamente il cavo di alimentazione;

1. Quick Setup

Accedere al TpLink all'IP 192.168.0.1 con parametri username: admin; password: admin

(Procedere con il cambio password a seguito di primo accesso e prima configurazione)

The screenshot shows the 'Quick Setup' wizard for a TP-Link device. A progress bar at the top indicates the steps: Region and Time Zone (current), Select Internet Service Provider (ISP), Internet Setup, Wireless Settings, Connection Test, Summary, and VoIP. Below the progress bar, the text 'Select your Region and Time Zone.' is displayed. There are two dropdown menus: 'Region:' with 'Italy' selected, and 'Time Zone:' with '(GMT+01:00) Amsterdam, Berlin, Rome, Stockholm, Paris, Prague, Bratislava' selected. At the bottom right, there are 'Exit' and 'Next' buttons.

Appena effettuato l'accesso ci verrà chiesto di fare il Quick Setup chiedendoci la località e l'orario, inseriamo i parametri corretti e premiamo Next;


The screenshot shows the 'Quick Setup' wizard, Step 2: Select Internet Service Provider (ISP). The progress bar at the top shows 'Region and Time Zone' as completed and 'Select Internet Service Provider (ISP)' as the current step. Below the progress bar, there is an 'ISP List' section with a dropdown menu currently set to 'Other'. At the bottom right, there are 'Back' and 'Next' buttons. The top navigation bar includes 'Quick Setup', 'Basic', and 'Advanced' (highlighted in yellow), along with a language dropdown set to 'English' and 'Log out' and 'Reboot' links.

Una volta arrivati in questa schermata possiamo saltare la procedura iniziale cliccando, come indicato in giallo, su Advanced (è possibile farlo anche in modalità Basic, ma avremo la possibilità di inserire meno parametri per questo consigliamo fortemente di procedere con la modalità Advanced);



Guida alla Configurazione PPPOE su TPLINK EX510

2. Internet Access

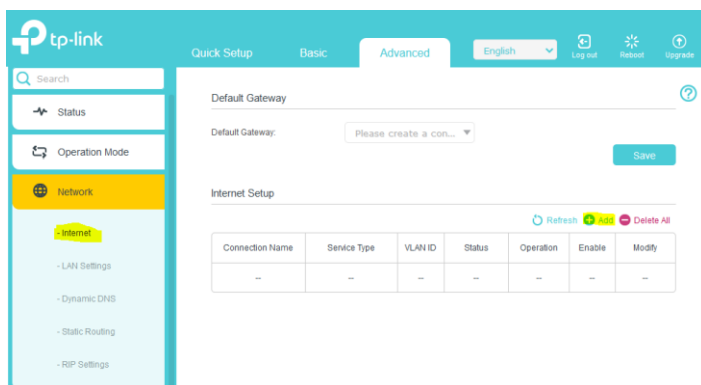

Andare nella sezione Network→Internet, e procedere configurando l'interfaccia DSL cliccando su +Add;

Internet Setup

Connection Name	Service Type	VLAN ID	Status	Operation	Enable	Modify
--	--	--	--	--	--	--

Connection Name: (Optional)

☒ Enable This Entry

Service Type: ☒ Internet ☐ IPTV ☐ TRGS ☐ Others

Default Gateway: Current Connection

Internet Connection Type: **PPPoE**

VLAN ID: **0** ☒ Enable

VLAN Priority: None

VLAN ID (1-4096): **838**

Username: **username@vv**

Password: **password**

Confirm Password: **password**

Connection Mode: ☒ Auto ☐ On Demand ☐ Manually

Authentication Type: AUTO_AUTH

IPv4: ☒ Enable

IPv6: ☐ Enable

Advanced

IPv6 Tunnel: ☐ Enable

Mechanism: DS-Lite

Configuration Type: ☒ Auto ☐ Manual

Service Name: (Do not change unless necessary.)

Access Concentrator Name: (Do not change unless necessary.)

MTU Size: **1492** (bytes, (The default is 1450, do not change unless necessary.))

NAT: ☒ Enable

Full-cone NAT: ☐ Enable

IGMP Proxy: ☒ Enable

Use the IP Specified by ISP: ☐ Enable

Echo Request Interval: 30 seconds. (0-120, The default value is 30.)

Use the Following DNS Addresses: ☐ Enable

MAC Clone

☒ Do NOT Clone MAC Address

☐ Clone Current Computer MAC Address

☐ Use Custom MAC Address

Cancel OK



Guida alla Configurazione PPPOE su TPLINK EX510

Procedere inserendo i parametri come riportati nell'immagine in giallo e lasciando gli altri settaggi come impostati di default, facendo particolare attenzione al VLAN ID ed alle credenziali PPPoE che saranno mandate via mail, procedere dando l'OK.

Una volta settato il tutto attendere qualche minuto che la PPPoE salga correttamente, e la configurazione si può ritenere conclusa.